

# CHISHOLM-MOORE HOIST CORPORATION

DIVISION OF COLUMBUS-McKINNON CHAIN CORP.

5047 Fremont Avenue, TONAWANDA, N. Y.

## BRANCHES

NEW YORK, N. Y.

CHICAGO, ILL.

CLEVELAND, OHIO

PHILADELPHIA, PA.

ST. CATHARINES, ONT., McKinnon-Columbus Chain, Ltd.

## Products

"AL-LITE" ALUMINUM BALL BEARING CHAIN HOISTS.  
"CYCLONE" HAND POWER CHAIN HOISTS.  
"BLUE BOY" HAND POWER DIFFERENTIAL CHAIN HOISTS.



"MOORE" BALL BEARING TROLLEYS.

"C-M" OVERHEAD TRAVELING CRANES.

Also:

"Standard" Hand Power Screw Chain Hoists.

"C-M" Low Headroom Trolley Hoists.

"C-M" Jib Cranes.

Special Cranes.

"C-M" I-Beam Monorail Systems.

"CYCLONE" ELECTRIC CHAIN HOISTS.

"C-M" WIRE ROPE ELECTRIC HOISTS.

"HI-UP" LOW HEADROOM ELECTRIC HOISTS.

"MATCHLESS" TIMKEN BEARING TROLLEYS.


## HAND POWER CHAIN HOISTS



At Left:

"Cyclone" Ball Bearing Hoist

Capacities  $\frac{1}{4}$  to 6 tons  
High speed. Spur geared  
8 ball bearings, 4 roller bearings  
90% efficiency  
Grease bath lubrication  
Exclusive gyrating yokes  
"Inswell" load chain  
"Cyclone" Roller Bearing Hoists  
Capacities 8 to 40 tons

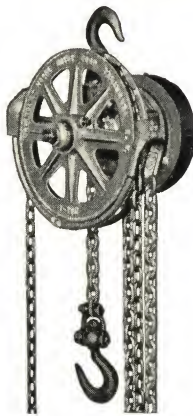

At Left:

"Al-lite" Safety Hoist  
(Alcoa Aluminum)

Capacities  $\frac{1}{4}$ ,  $\frac{1}{2}$ , 1 and 2 tons  
30% lighter  
Ball bearing  
Adjustable brake  
High speed. Spur geared  
Fewer parts  
Enclosed. Oiltight  
Safety overload governor




At Left:

"Blue Boy" Differential Hoist


Capacities  $\frac{1}{4}$  to 3 tons  
Heavy sheaves  
Reinforced ribbed frames  
"Inswell" chain  
Drop-forged hooks  
Very durable  
Copperized chain  
Painted blue duco

## ELECTRIC HOISTS




"C-M" Wire Rope Electric Hoist

Capacities  $\frac{1}{4}$  to 10 tons, inclusive  
Compact, simple design  
Very accessible  
Hyatt bearings  
Hand power or motor driven trolleys  
Timken bearing wheels  
Single or variable speeds



"Cyclone" Electric Chain Hoist

Capacities  $\frac{1}{2}$  to 3 tons, inclusive  
8 ball bearings and 4 roller bearings  
Magnetic brake. Positive control  
Low headroom. Unlimited lift  
Upper and lower safety limits  
Hook or trolley suspension  
Light weight. Low price



"Hi-Up" Wire Rope Electric Hoist


Capacities  $\frac{1}{4}$  to 1 ton, inclusive  
Minimum headroom  
Maximum lift  
Very accessible  
Push button control  
Magnetic brake  
Accurate control  
Hyatt bearings

## CRANES AND TROLLEYS



Matchless Timken Bearing Trolley

Capacities  $\frac{1}{2}$  to 40 tons, inclusive  
Plain or geared  
8 Timken bearings  
Flangeless wheels  
Vertical guide rollers  
Safety lugs and bumpers

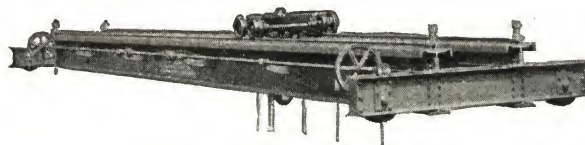

"C-M" Overhead Traveling Cranes

Capacities  $\frac{1}{2}$  to 40 tons, inclusive  
Hand power and motor drive  
Single and double I-beam  
Hyatt or Timken roller bearings  
Floor or cab control



"Moore" Ball Bearing Trolley

Capacities 1 and 2 tons  
Pressed steel wheels  
Ball bearings  
Safety lugs and bumpers  
Light weight  
Adjustable